DIAGNOSTICS: SYSTEM TEST – SMART STOP MODE
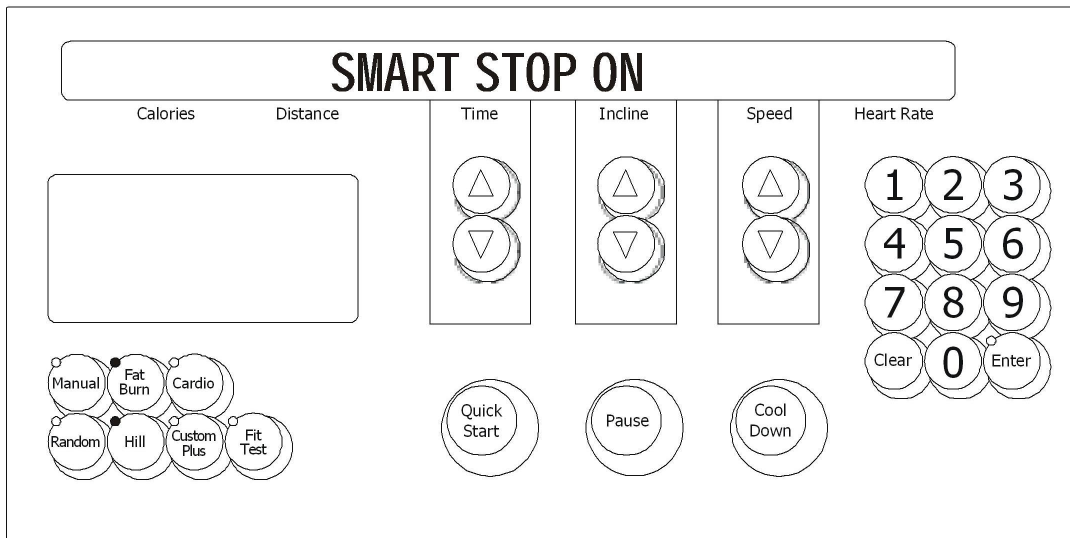
Upon entry into the test, if the smart stop PCB is not plugged in, a message will be displayed "Smart Stop Unplugged". This test will allow the user to test the Smart Stop System. If the smart stop system detects a user it will scroll the profile window from empty to full depending on the percentage of detection that is occurring. Other smart stop information will scroll automatically every 3 seconds.

The following is a list of the current information that can be seen. If an error has occurred, refer to the troubleshooting section for corrective action.

ERROR CONDITION	DISPLAYED INFORMATION
SMART STOP UNPLUGGED	SMART STOP ON
	SMART STOP OFF
	USER DETECTED
	USER NOT DETECTED
	SMART STOP ADJUST-XX

The smart stop system can be turned ON/OFF in this test. When the message "SMART STOP ON" is placed on the message center, an arrow key will toggle it to "SMART STOP OFF".

The display can be put into a locked mode by pressing the 'PAUSE' key. This will prohibit the scrolling of the smart stop information.

Pressing the 'CLEAR' key to exit the smart stop test and return to the System Test Menu.