



Red: PAINTED ITEMS
Blue: KITS

- 1. All labeled components are to be assembled before shipment unless otherwise noted.
- 2. All bearings are to be pressed in with force applied to outer ring only.
- 3. All hardware to be torqued to specs listed in chart below.
- 4. Special notes if any are shown below.

PART NO.	F3AT-M/QTY.	DESCRIPTION	PART NO.	F3AT-M/QTY.	DESCRIPTION
01-0011	2	1/2 -13 UNC x 3 Bolt	17-1625	2	GUIDE ROD F3 Towers
01-1331	2	1/2 -13 UNC x 2 3/4 Bolt	45-1042	4	EFSON 4 1/2" PULLEY
01-4042	5	BOLT BH , 1/2 -13 x 1 3/4" ZINC	51-0181	1	PULLEY BRACKET 6"
01-4051	2	BOLT BH , 3/8 -16 x 1" ZINC	56-0234	1	Bracket AT Lower Pulley (EVO)
01-4077	5	BOLT BH , 1/2 -13 x 3" ZINC	56-0242	4	Cable Bolt
01-4082	5	BOLT BH , 1/2 -13 x 2" ZINC	56-0244	1	LOWER TUBE GUARD
01-4110	1	1/2 -13 UNC x 2 3/4 Bolt Full Thread	56-0245	1	TUBE, ADJUSTMENT
02-2049	4	SCREW AFH #8 -32 UNC x 1" ZINC	56-0246	4	SPACER, BEARING OFFSET
02-9190	2	1/4-20 x 3/4 TORX Pan Hd Type "F" Black	56-0247	4	NUT, ADJ PULLEY SWIVEL
03-1035	2	3/8" Lock Nut	56-0256	4	SPACER, ADJ TUBE
03-1055	17	1/2" Lock Nut	56-0257	4	BEARING, DEEP GROOVE BALL
03-4031	4	8-32 INSERT HEX	56-0266	2	BALL CABLE RECESSED
03-4247	2	Cage Nut	56-0455	2	3" Wide Accessories Hook
03-5104	2	1/2" Hex Nut	56-0533	1	PLATE, 4-1 ATTACHMENT
04-5207	22	WASHER, FLAT, 1/2" SAE	56-0579	1	EVO Extended Weight Attachment Pin
06-4077	1	Cable assembly F3AT	60-1301	1	ASSY, TOWER FRAME, F3AT
06-5020	3	CLIP, CARABINEER	63-1306	1	WDMT, ADJ PULLEY SYSTEM
06-7080	2	SLOTTED STRAP FORK	63-1307	2	WDMT, ADJ PULLEY GUARD
07-4805	2	Hand Grip / Ankle Cuff	56-0050	1	Plunger Assembly Length Blue
07-5568	20	IDLER PULLEY SPACER	OPT-WT-32	1	EVO 240 LB Weight Stack 10 LB Top Plate
07-9286	2	SLIDE CAP FOR 2" TUBE			
09-3065	6	PLASTIC PLUG - 9/16"			
09-3069	4	1/2" DIA HOLE PLUG BLACK			
09-5030	1	FOOTPAD MOLDED BLACK			
09-8018	2	GUIDE ROD BUSHING			
09-8322	6	Pulley 6 1/2" cable			
12-1193	4	PINCH POINT WARNING DECAL			
12-1380	1	Made In USA			
12-1410	1	WL#2 ENGAGE ADJUSTMENT MECHANISM			
12-1411	1	WL#6 MAX USER WEIGHT 350 LBS			
12-1814	1	WARNING LABEL, GENERAL WARNING LABEL			
12-5619	1	Nautilus Transfer Decal - Small BLACK			
12-5620	1	NLS Logo 3" Decal			
12-6044	1	WARNING - Tip Over Decal			
12-6046	1	Made In USA - Seat Frames			
12-7050	1	EVO Weight Selector Pin Decal			



Bolt Torque Specifications		
Size	Grade 5	Grade 8
	Torque (ft-lbs)	Torque (ft-lbs)
1/4-20	8	12
1/4-28	10	14
5/16-18	17	25
3/8-16	30	45
7/16-14	50	70
1/2-13	75	110
1/2-20	90	120
5/8-11	150	220
5/8-18	180	240


Customer Service & Parts 800/ 235-2233
General Parts Requests: parts@medfitsys.com
Warranty Field Service Requests: servicerequest@medfitsys.com
Med-Fit Systems, Inc. 800/ 831-7665

www.medfitsystems.com

F3 Adjustable Tower (With EVO Medical Weight Stack)
F3AT-M



Red: PAINTED ITEMS
Blue: KITS

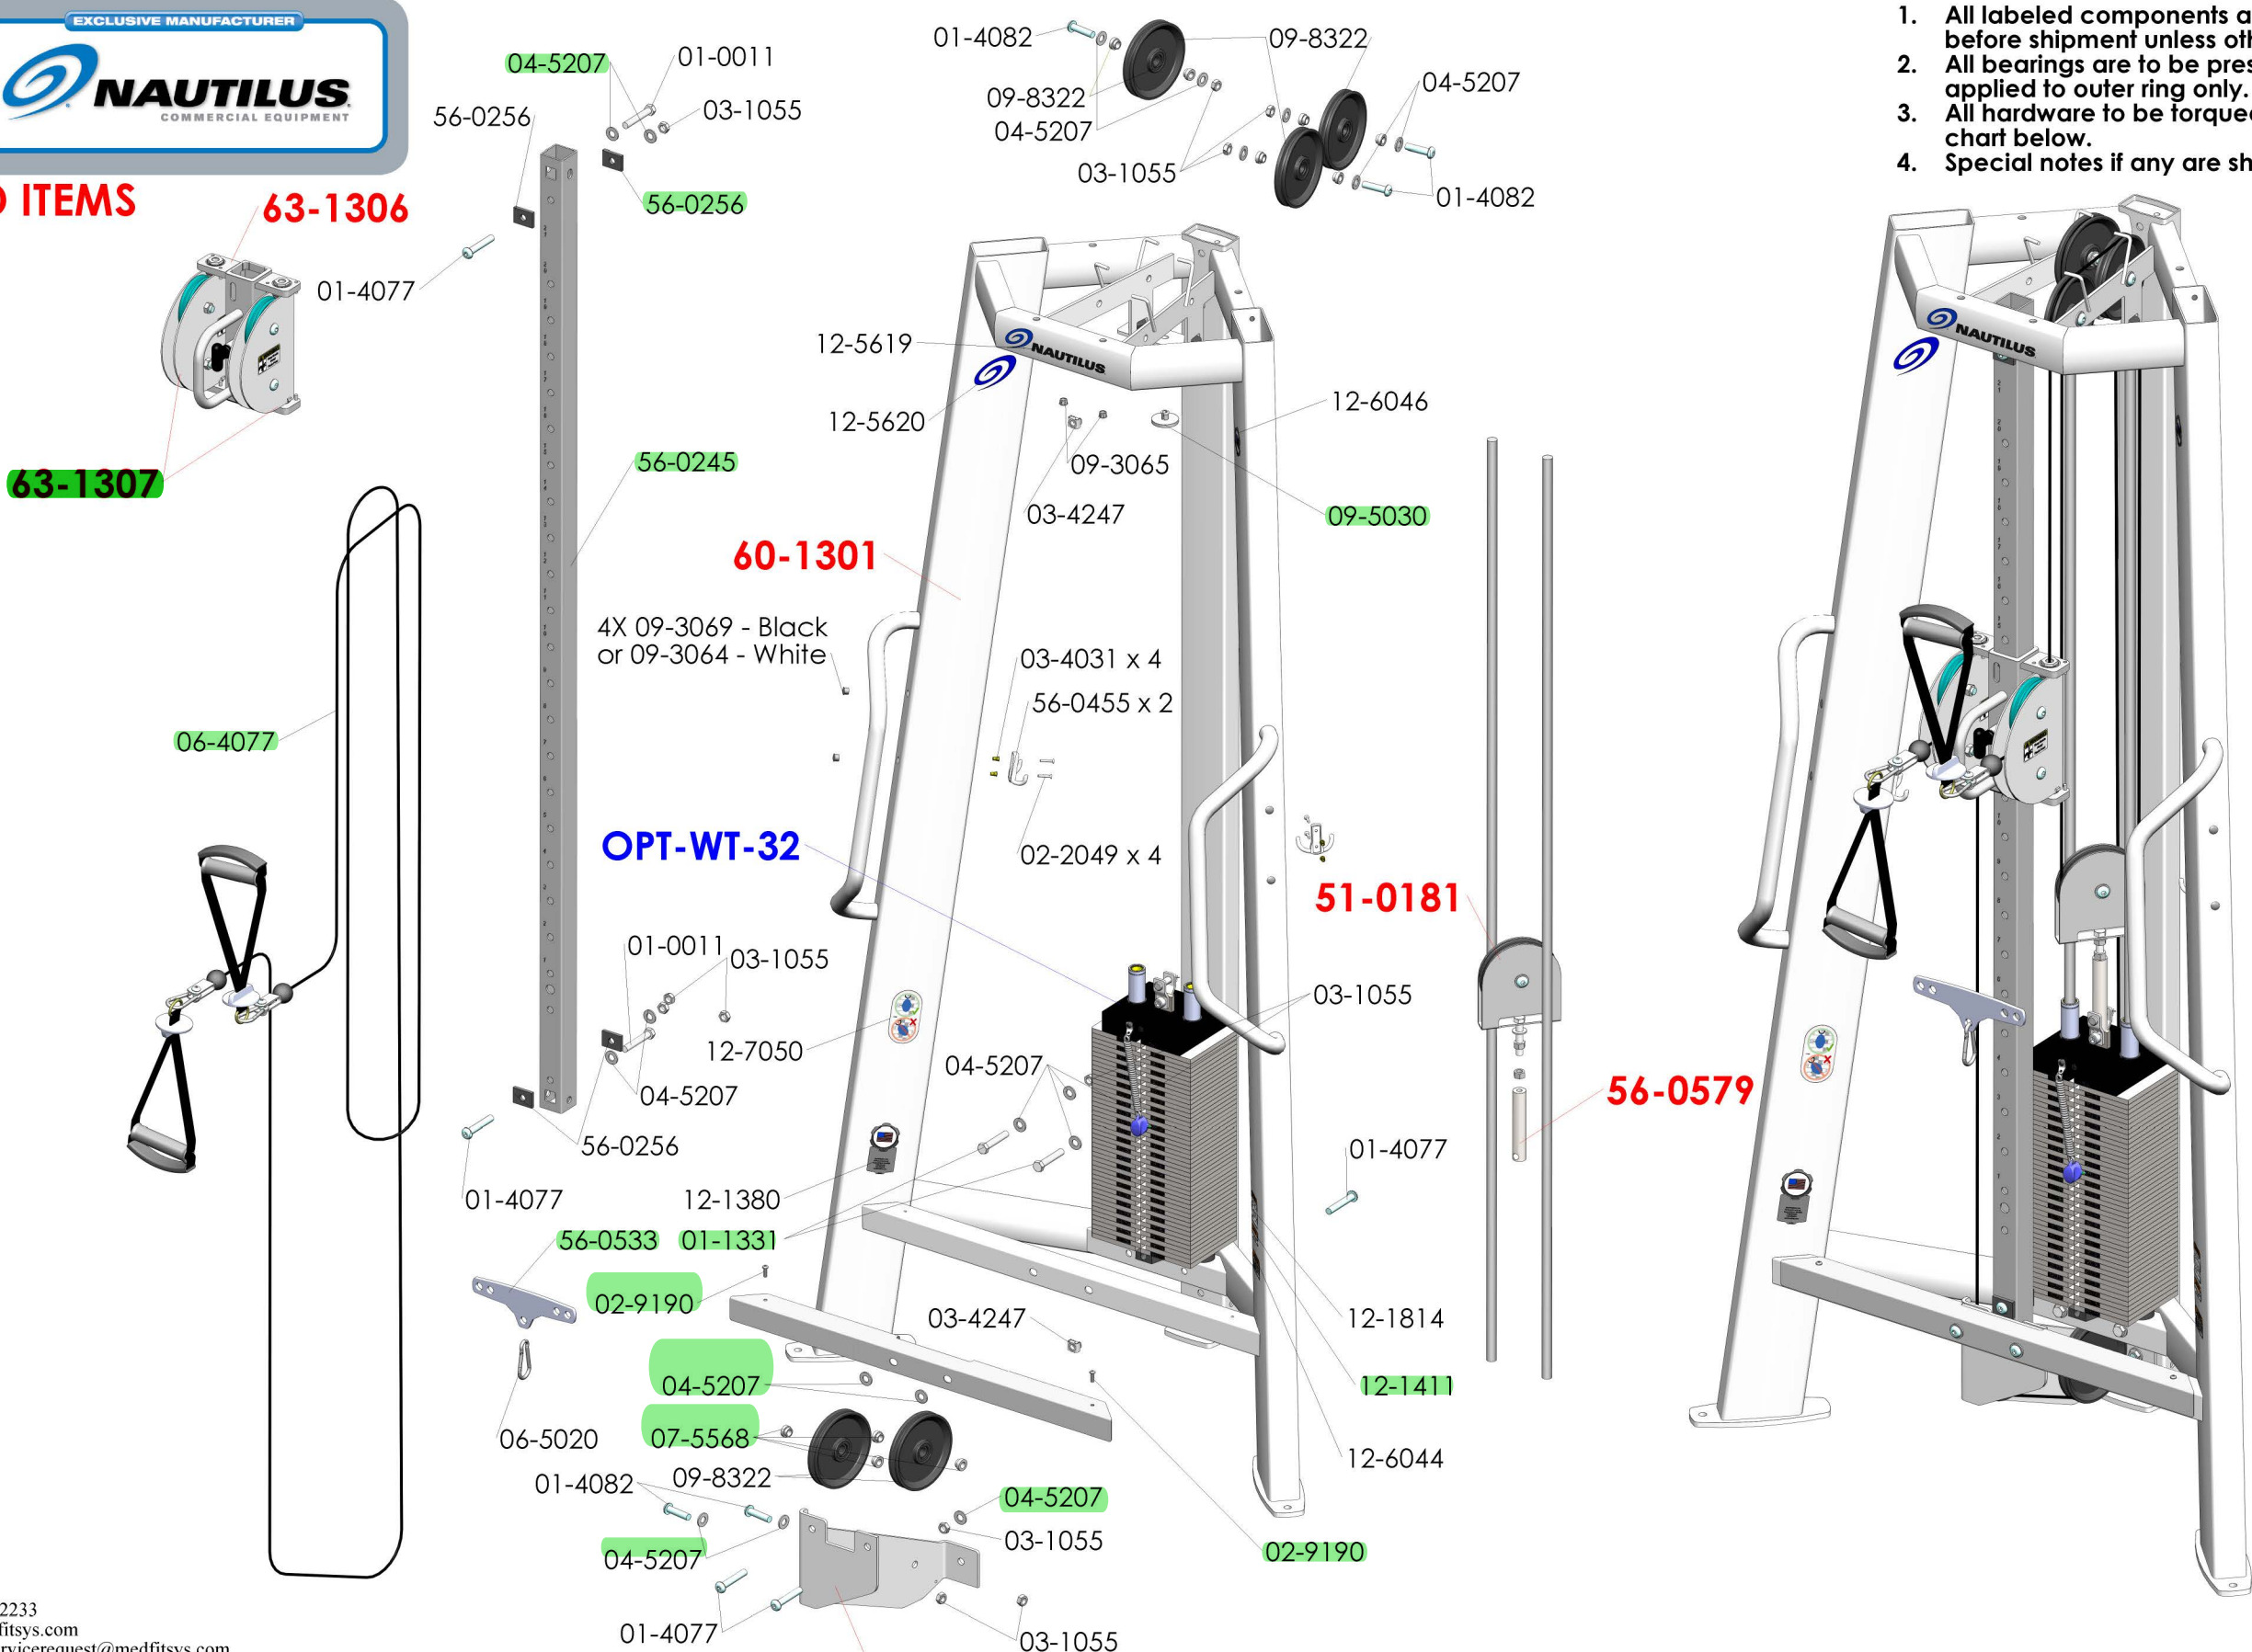

1. All labeled components are to be assembled before shipment unless otherwise noted.
2. All bearings are to be pressed in with force applied to outer ring only.
3. All hardware to be torqued to specs listed in chart below.
4. Special notes if any are shown below.

Customer Service & Parts 800/ 235-2233
General Parts Requests: parts@medfitsys.com
Warranty Field Service Requests: servicerequest@medfitsys.com
Med-Fit Systems, Inc. 800/ 831-7665


www.medfitsystems.com

F3 Adjustable Tower (With EVO Medical Weight Stack)
F3AT-M


Bolt Torque Specifications		
Size	Grade 5	Grade 8
	Torque (ft-lbs)	Torque (ft-lbs)
1/4-20	8	12
1/4-28	10	14
5/16-18	17	25
3/8-16	30	45
7/16-14	50	70
1/2-13	75	110
1/2-20	90	120
5/8-11	150	220
5/8-18	180	240



Red: PAINTED ITEMS
Blue: KITS

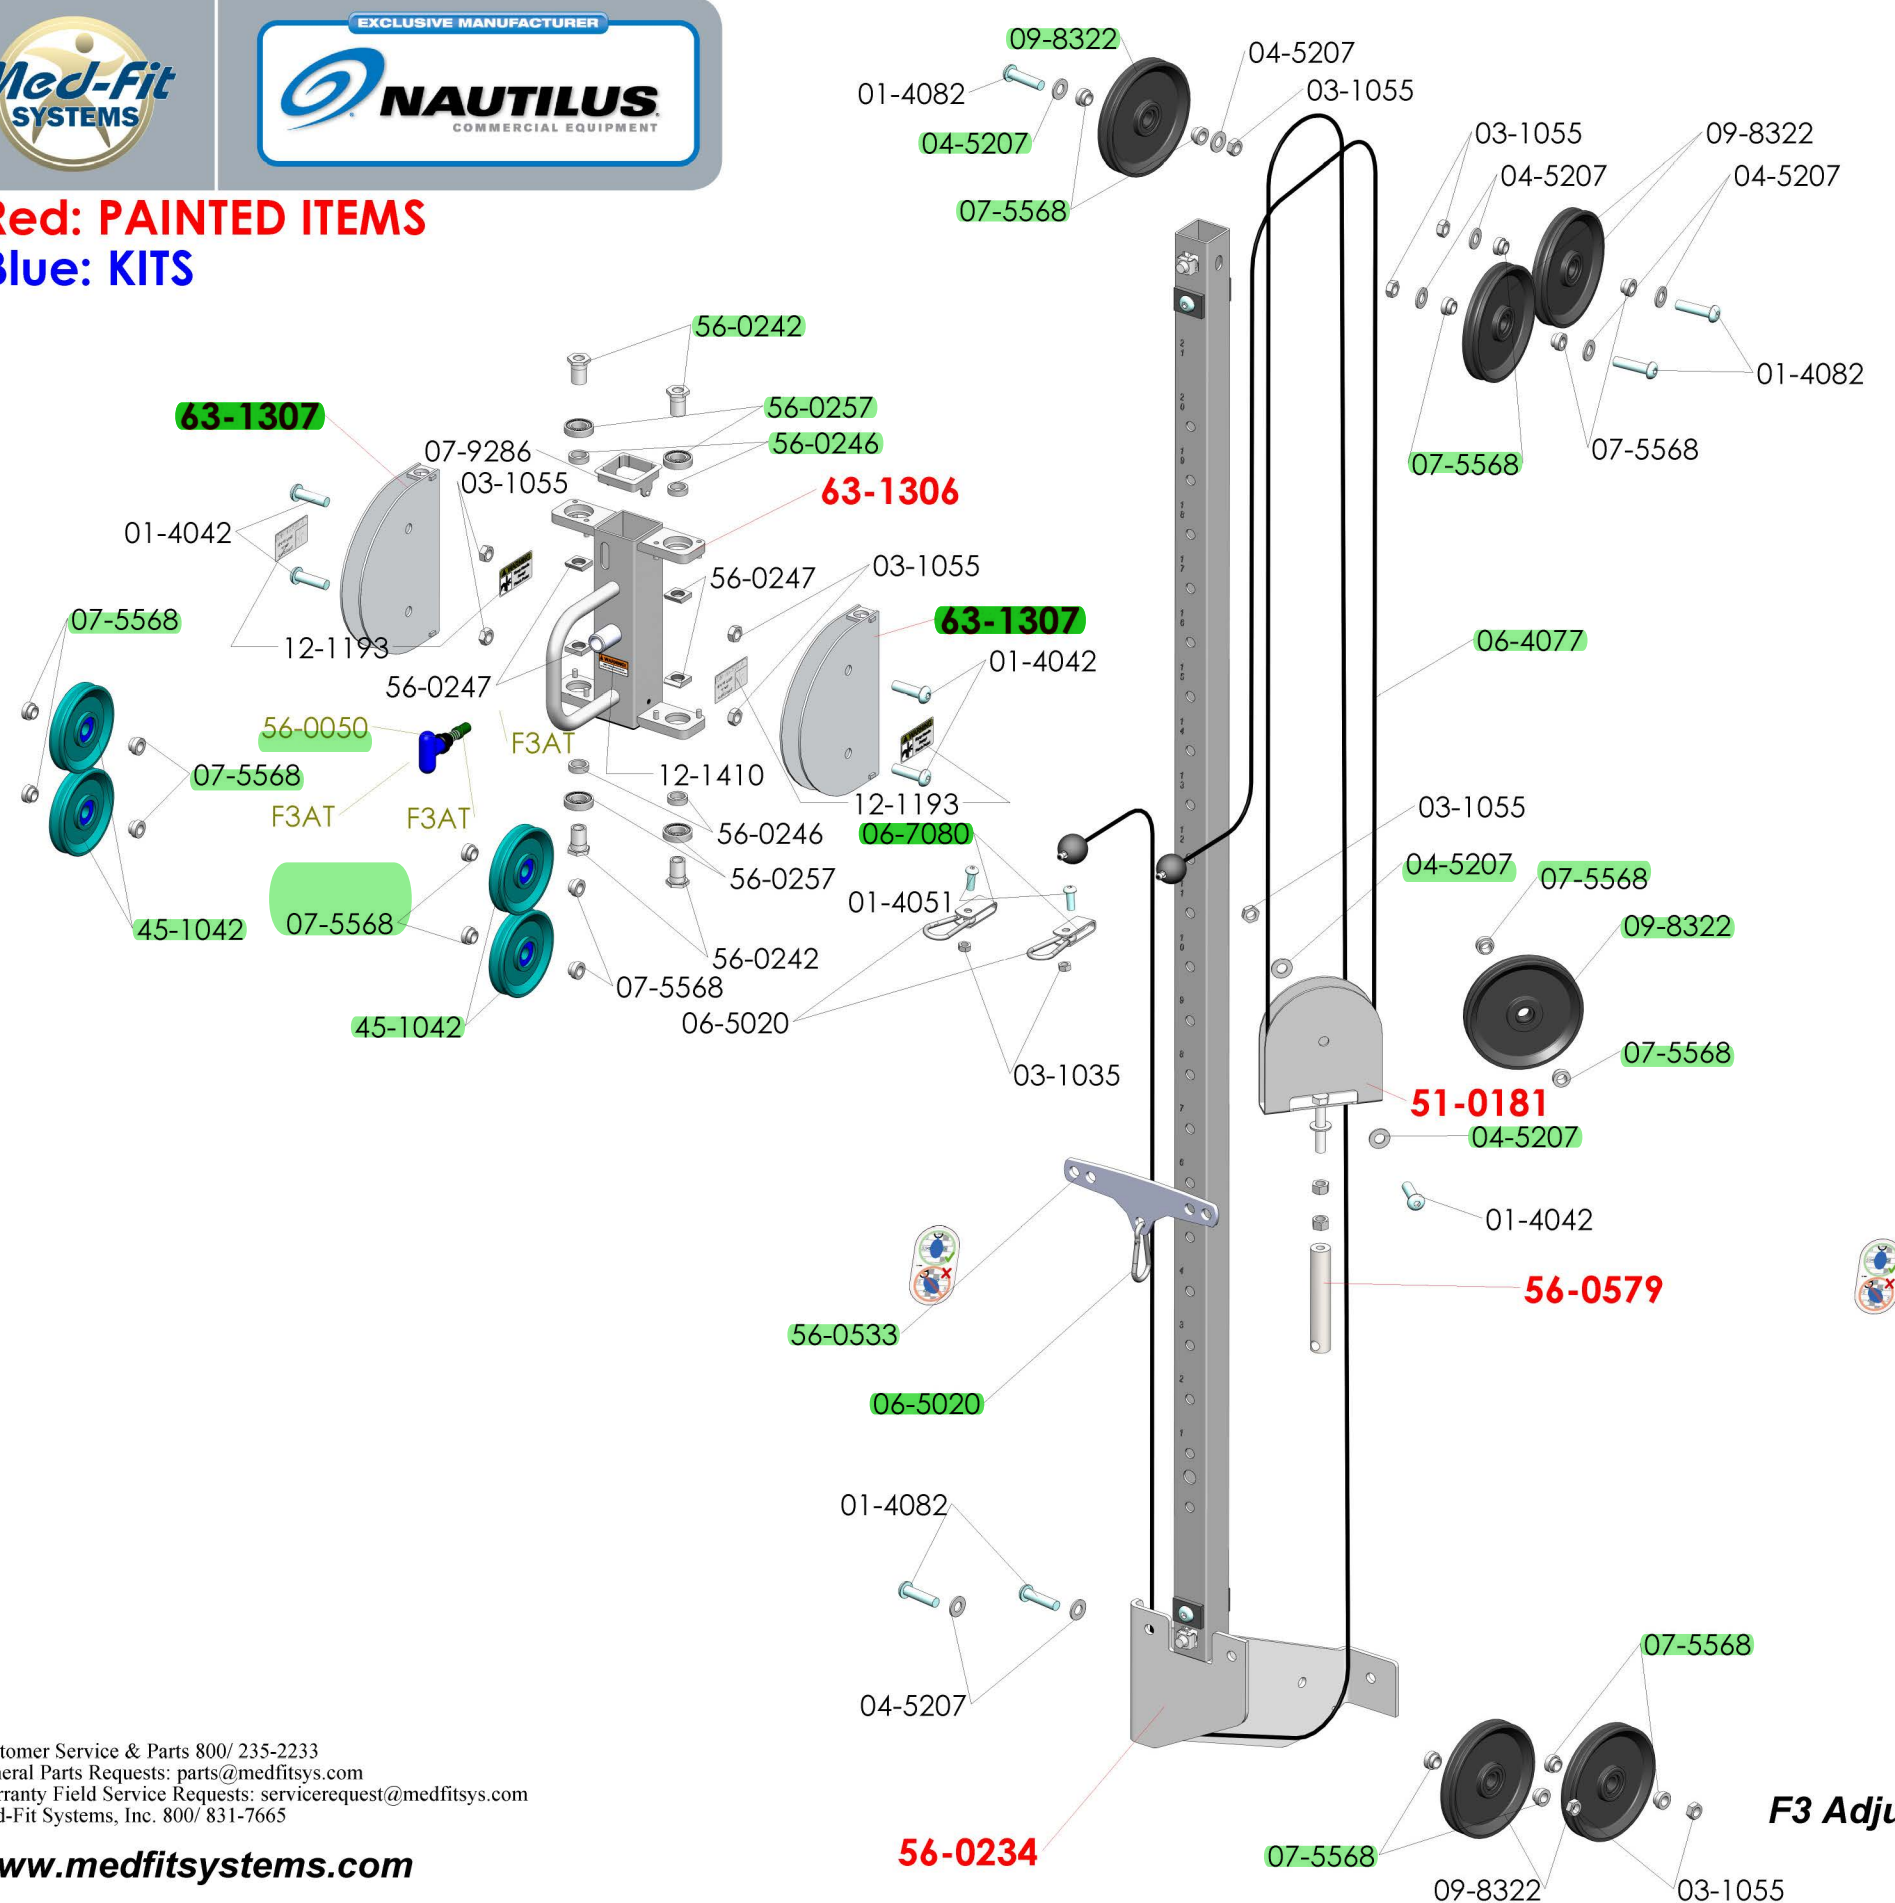

- 1. All labeled components are to be assembled before shipment unless otherwise noted.
- 2. All bearings are to be pressed in with force applied to outer ring only.
- 3. All hardware to be torqued to specs listed in chart below.
- 4. Special notes if any are shown below.

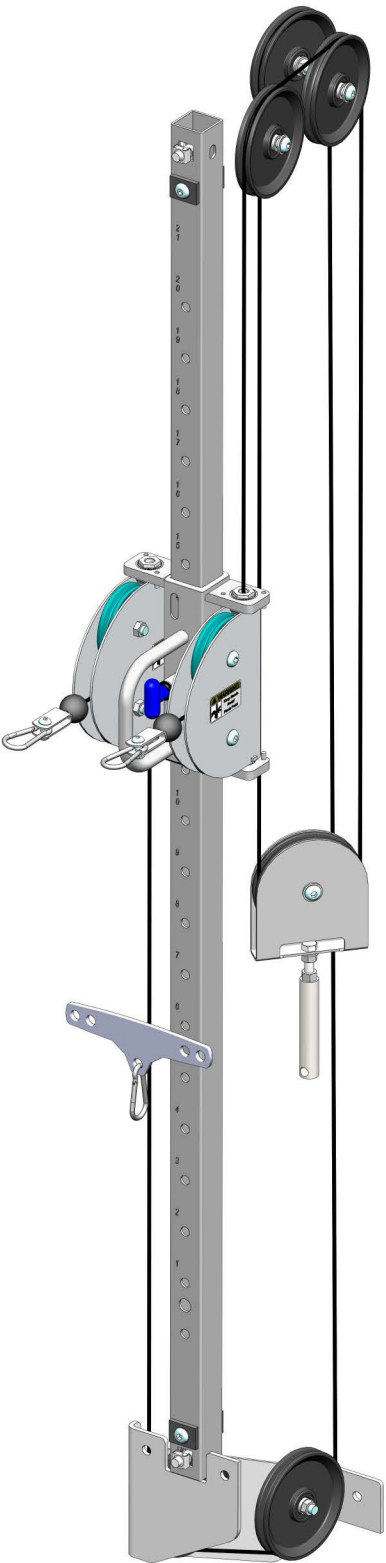

F3 Adjustable Tower (With EVO Medical Weight Stack)
F3AT-M


Bolt Torque Specifications		
Size	Grade 5	Grade 8
	Torque (ft-lbs)	Torque (ft-lbs)
1/4-20	8	12
1/4-28	10	14
5/16-18	17	25
3/8-16	30	45
7/16-14	50	70
1/2-13	75	110
1/2-20	90	120
5/8-11	150	220
5/8-18	180	240

Customer Service & Parts 800/ 235-2233
General Parts Requests: parts@medfitsys.com
Warranty Field Service Requests: servicerequest@medfitsys.com
Med-Fit Systems, Inc. 800/ 831-7665


www.medfitsystems.com



Red: PAINTED ITEMS
Blue: KITS

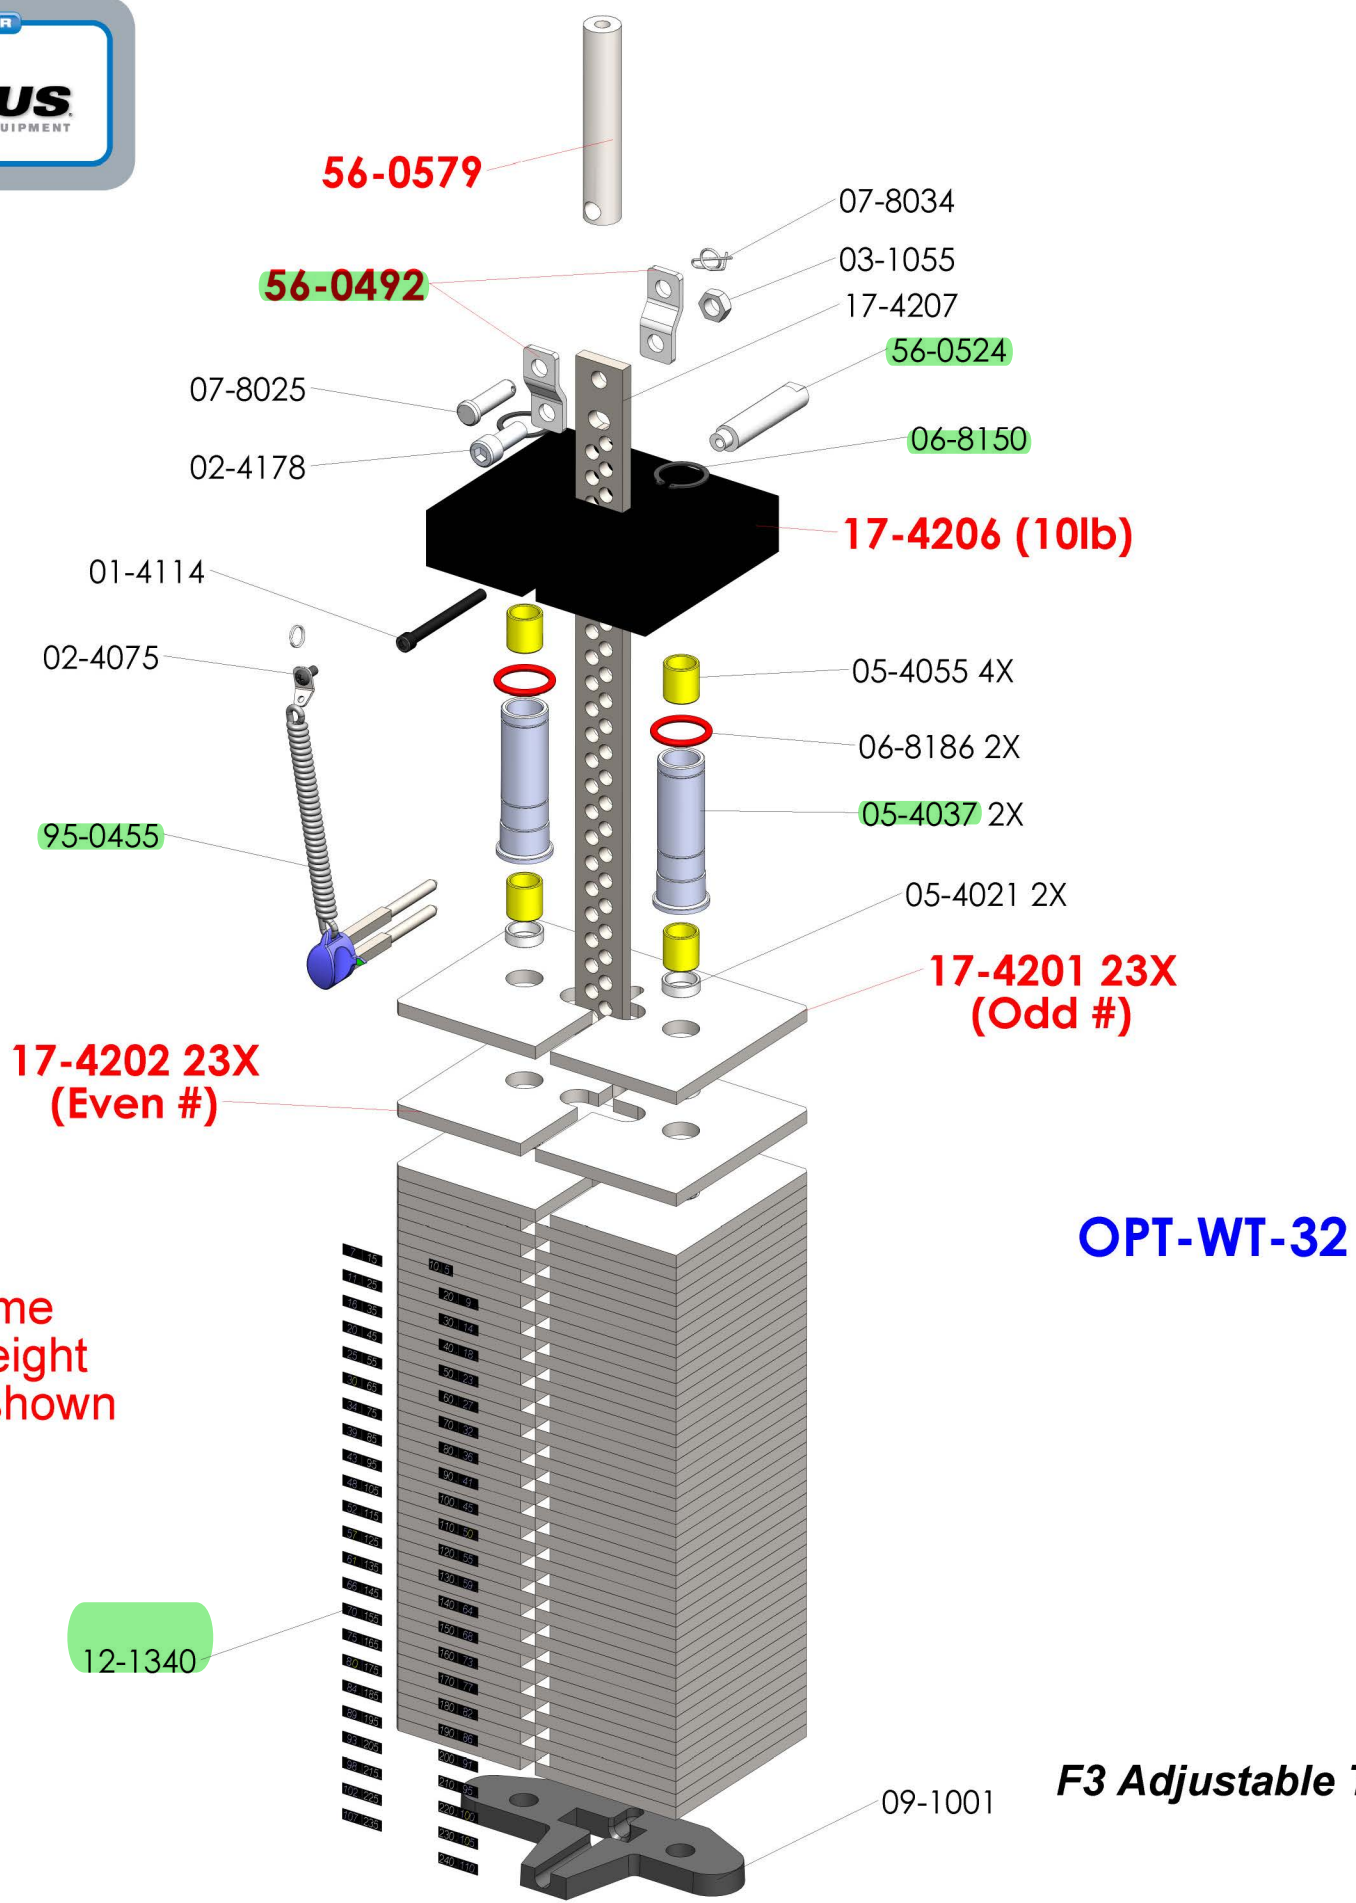

- 1. All labeled components are to be assembled before shipment unless otherwise noted.
- 2. All bearings are to be pressed in with force applied to outer ring only.
- 3. All hardware to be torqued to specs listed in chart below.
- 4. Special notes if any are shown below.


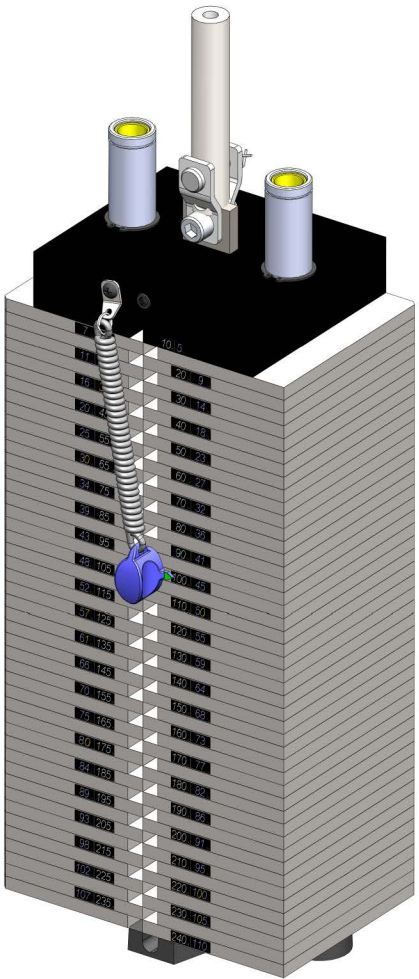


Bolt Torque Specifications		
Size	Grade 5	Grade 8
	Torque (ft-lbs)	Torque (ft-lbs)
1/4-20	8	12
1/4-28	10	14
5/16-18	17	25
3/8-16	30	45
7/16-14	50	70
1/2-13	75	110
1/2-20	90	120
5/8-11	150	220
5/8-18	180	240


F3 Adjustable Tower (With EVO Medical Weight Stack)
F3AT-M



Red: PAINTED ITEMS
Blue: KITS

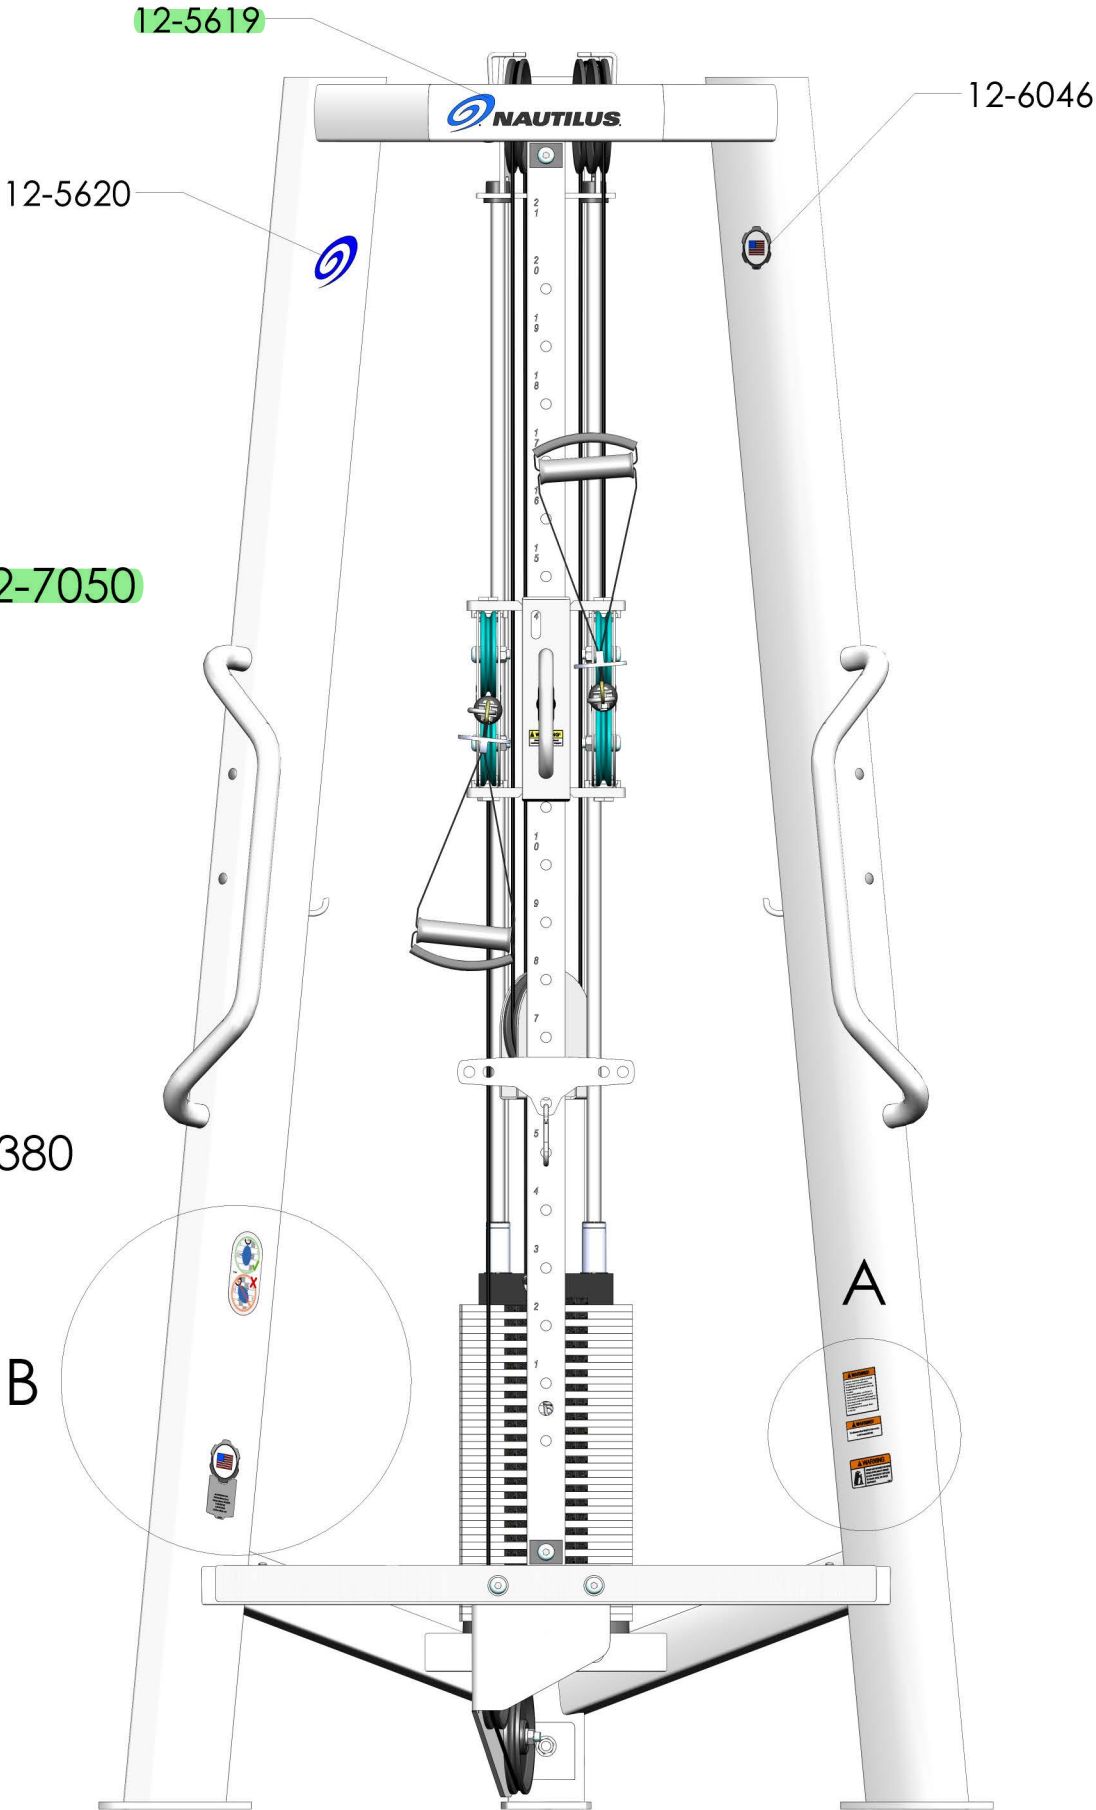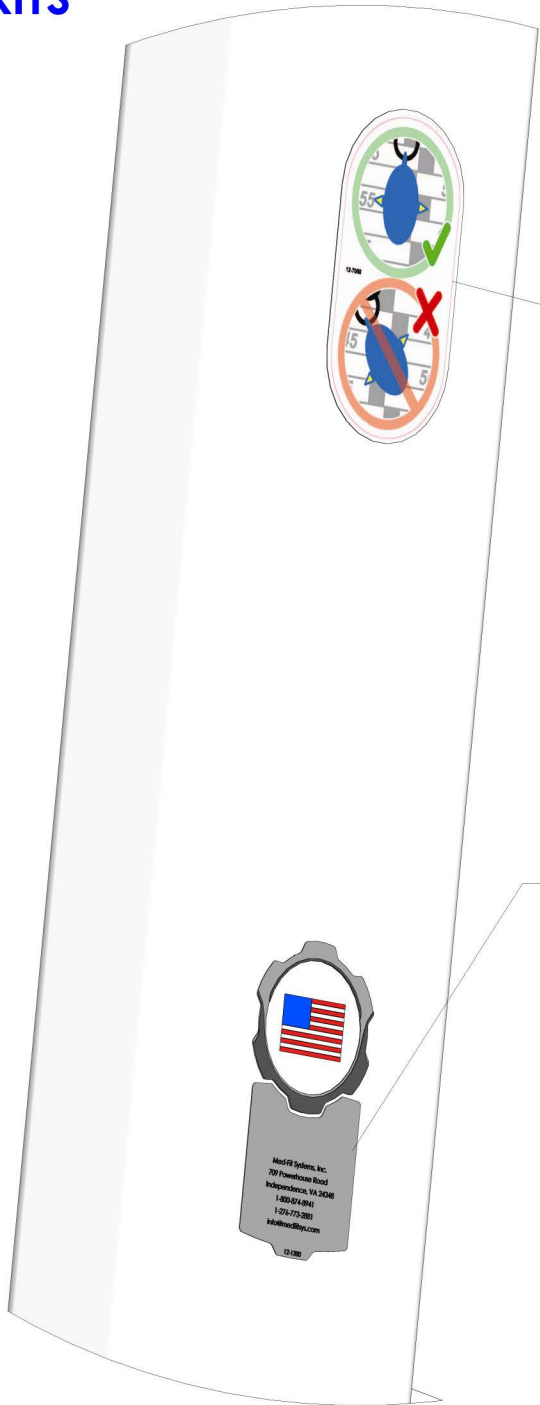

1. All labeled components are to be assembled before shipment unless otherwise noted.
2. All bearings are to be pressed in with force applied to outer ring only.
3. All hardware to be torqued to specs listed in chart below.
4. Special notes if any are shown below.

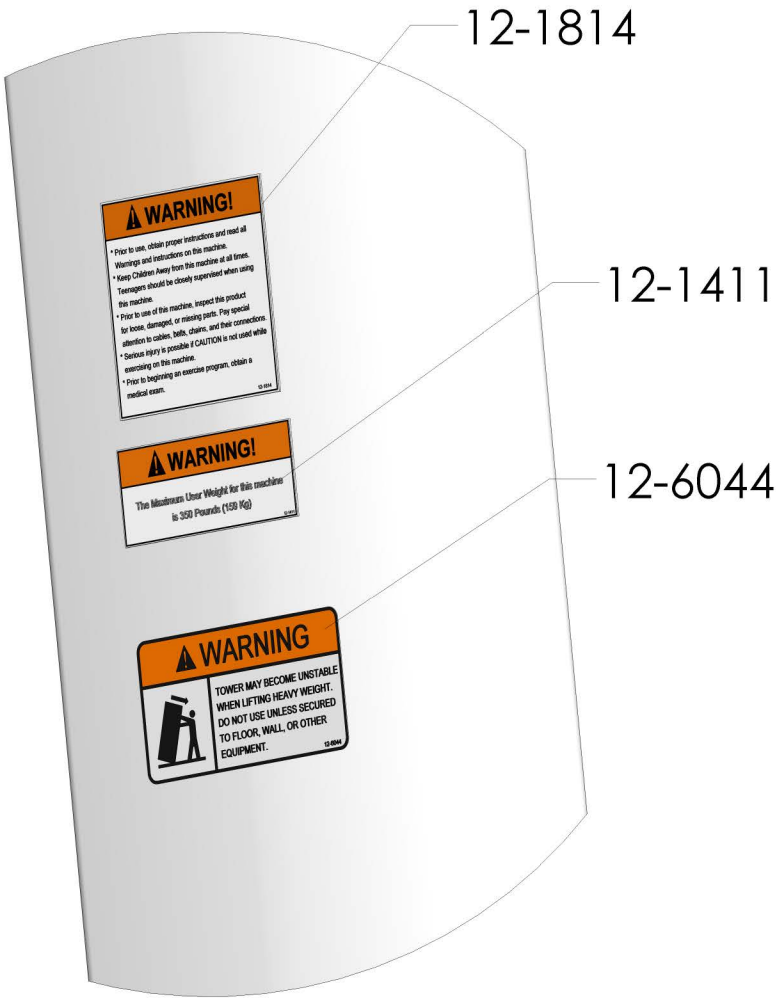

DETAIL A
SCALE 1 : 2

Customer Service & Parts 800/ 235-2233
General Parts Requests: parts@medfitsys.com
Warranty Field Service Requests: servicerequest@medfitsys.com
Med-Fit Systems, Inc. 800/ 831-7665



www.medfitsystems.com

Bolt Torque Specifications		
Size	Grade 5	Grade 8
	Torque (ft-lbs)	Torque (ft-lbs)
1/4-20	8	12
1/4-28	10	14
5/16-18	17	25
3/8-16	30	45
7/16-14	50	70
1/2-13	75	110
1/2-20	90	120
5/8-11	150	220
5/8-18	180	240



Customer Service & Parts 800/ 235-2233
General Parts Requests: parts@medfitsys.com
Warranty Field Service Requests: servicerequest@medfitsys.com
Med-Fit Systems, Inc. 800/ 831-7665

www.medfitsystems.com

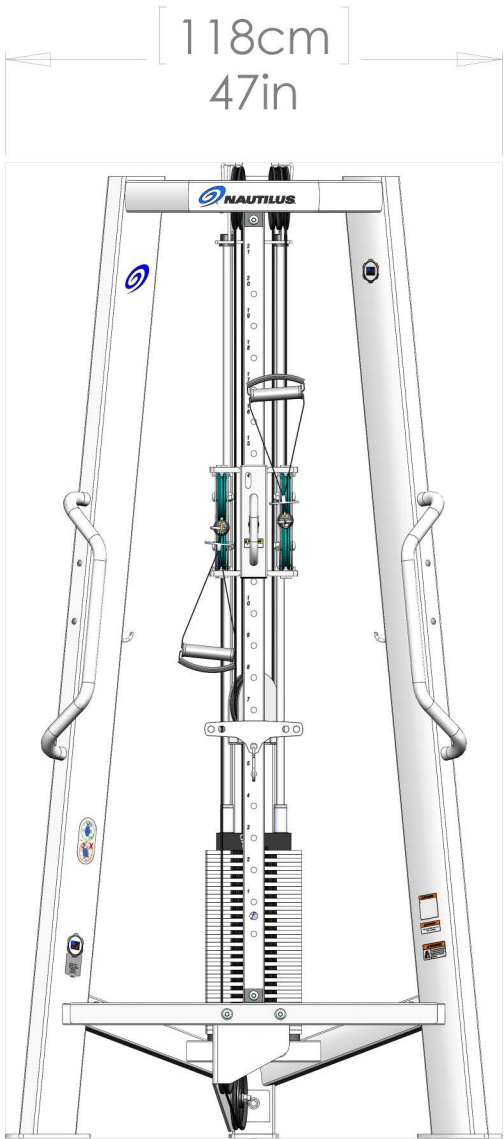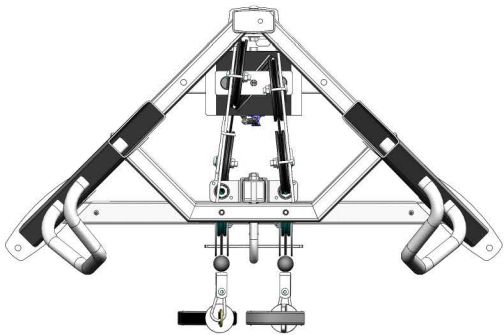

5/3/13	F3AT-M
<u>Units</u>	<u>Weight</u>
lbs	507
kg	230

F3 Adjustable Tower (With EVO Medical Weight Stack)

F3AT-M