


BATTERY TRAY FITUP

Number	Nitro Plus/QTY.	DESCRIPTION
57-0633	1	BATTERY TRAY MOUNT, 3.2 Ah BATTERY
57-0632	1	BATTERY TRAY, 3.2 Ah BATTERY
57-0609	1	BATTERY 12V 3.4Ah 134 x 68 x 67mm LEAD ACID
01-4122	5	BOLT BH 1/4 -20 x 1" SS BLACK
03-4033	1	NUT INSERT, 1/4-20, HEX
25611	1	RESISTOR
03-4290	2	1/4" Whiz Nut
57-0598	1	CABLE, ASSY,BATTERY, K2, RoHS
SM40236	4	FASTENER, HOOK
SM40235	4	FASTENER, HOOK

New Fasteners
Thread into Rivnuts in frame
Step 6

Place new battery here
Step 9

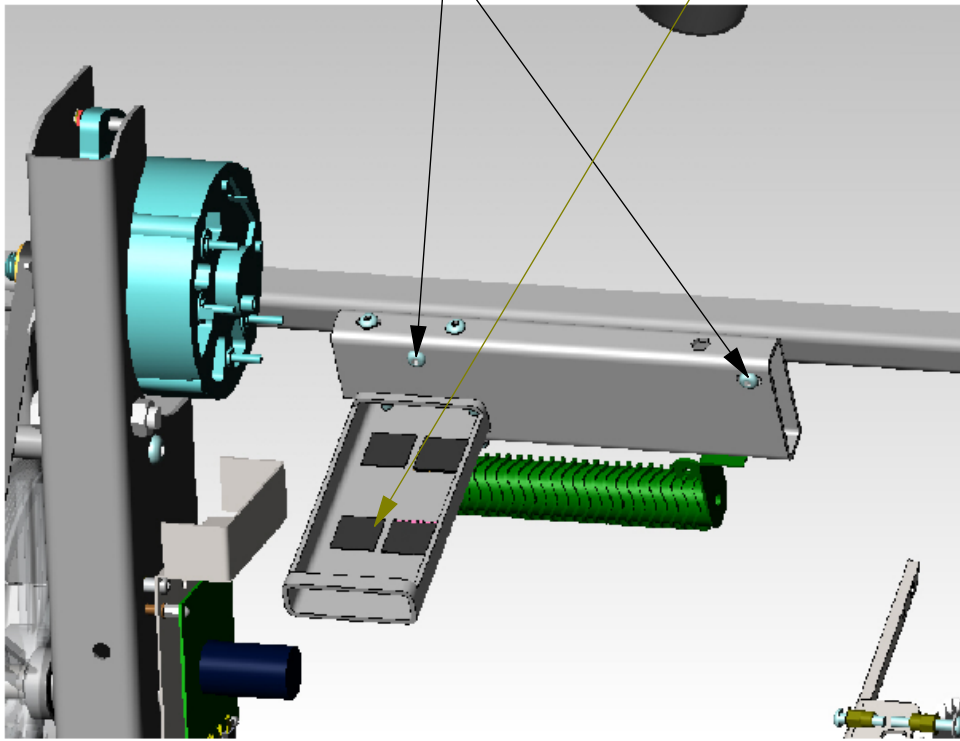

1. Open access panel .
2. Remove 1.3 Ah battery, it will not be needed.
3. Verify that the battery wire harness is same as 57-0598 (has fuseholder)
4. **If it is not** : Replace with harness supplied.
5. Remove screws in Resistor (25611) and unplug at circuit board. It will be reinstalled later.
6. Install battery tray assembly as pictured. Use 1 1/2 long screws supplied to secure it where resistor was attached earlier. Tighten screws securely.
7. Reattach resistor to the bottom of battery tray assembly using one short screw into revnut and one long screw to secure to p/n 57-0633.
8. Reattach resistor wire harness to circuit board. Tighten all screws securely.
9. Install battery insuring the velcro on the bottom will engage the velcro in the tray.
10. Install tie wraps around middle to anchor the batteryto frame.

REVISIONS

ECO	REVISION	REV DESCRIPTION	APPROVED	DATE
-----	----------	-----------------	----------	------

