

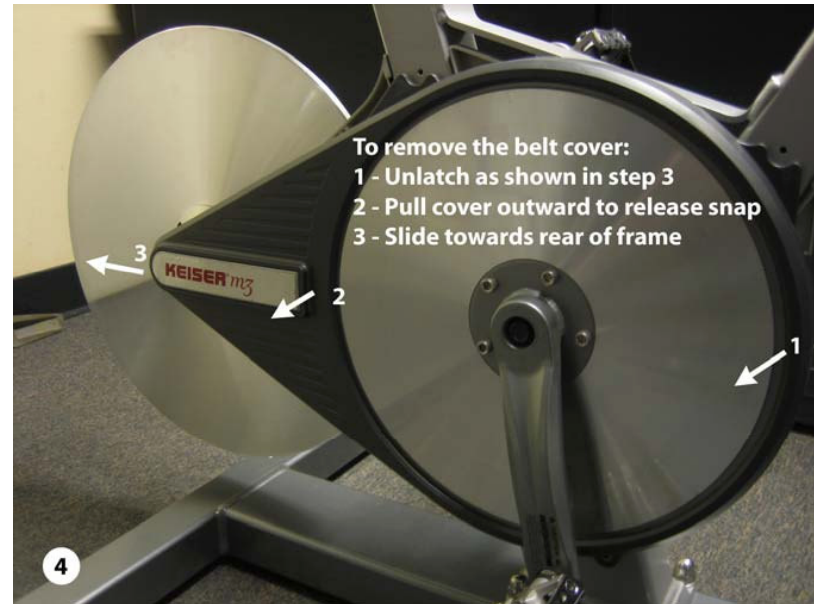
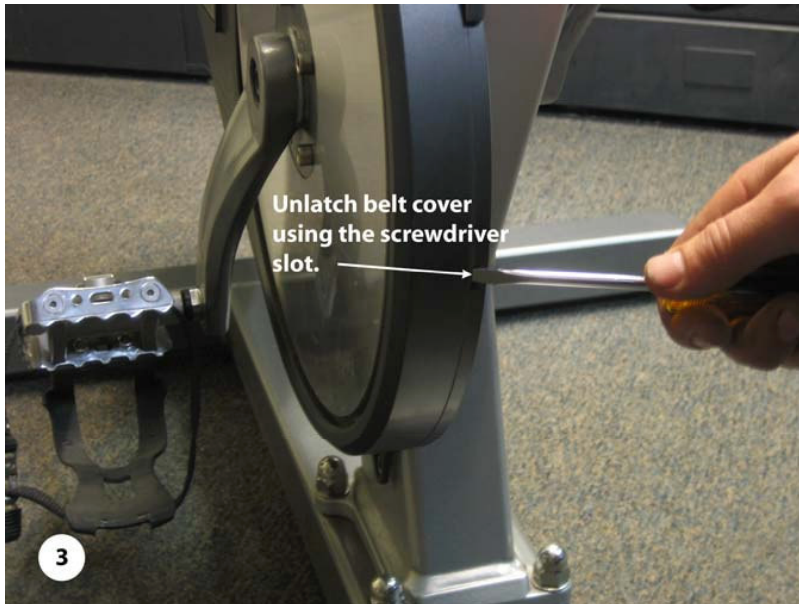
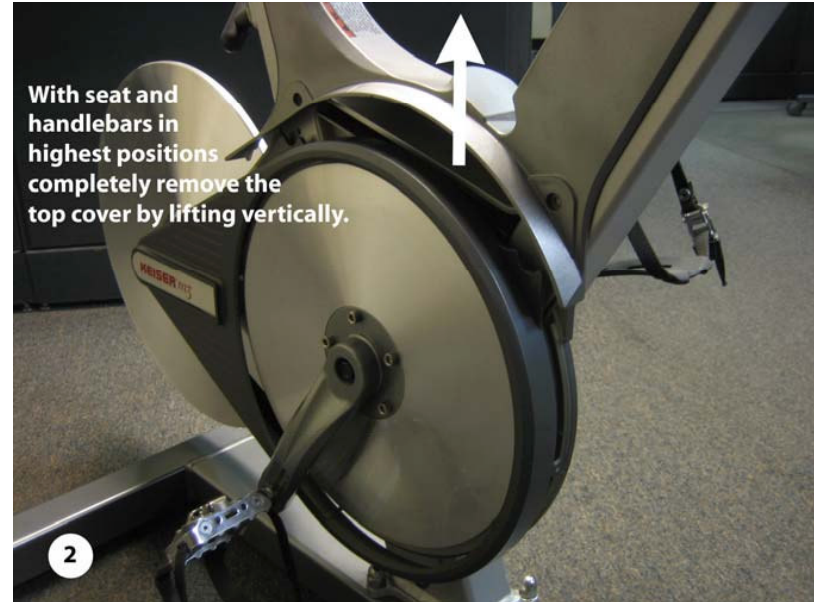
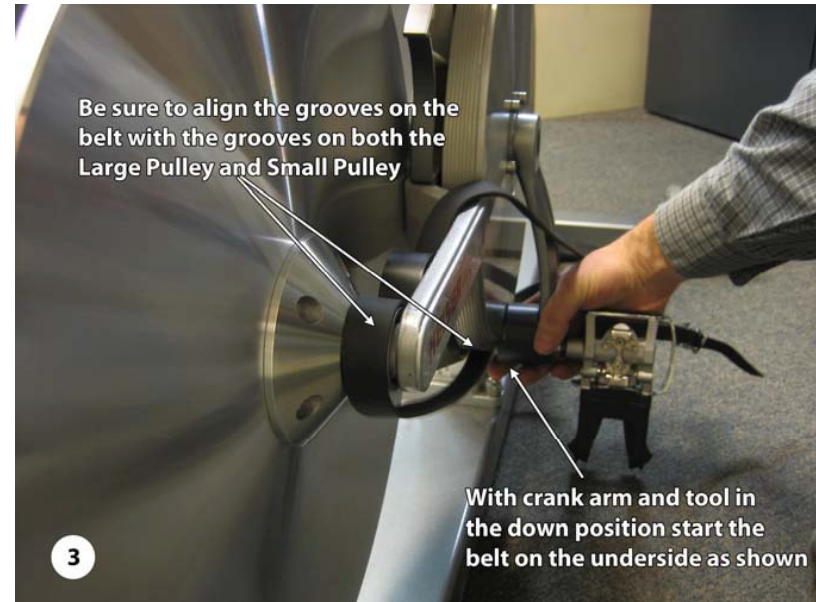


STEPS FOR BELT REMOVAL / INSTALLATION




Tools Required:
#1 Phillips screwdriver
#2 Phillips screwdriver
Standard screwdriver
Keiser belt removal kit (PN 550818)

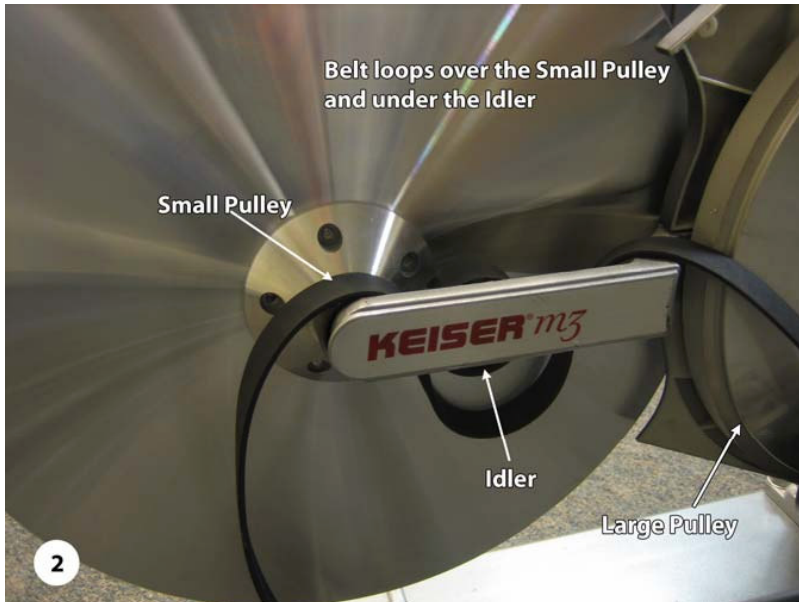

STEPS FOR BELT REMOVAL / INSTALLATION

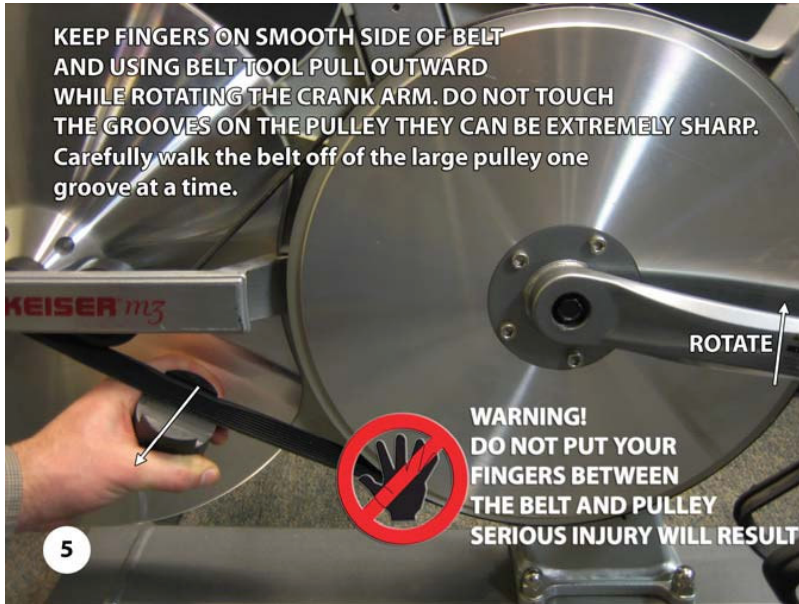

STEPS FOR BELT REMOVAL / INSTALLATION

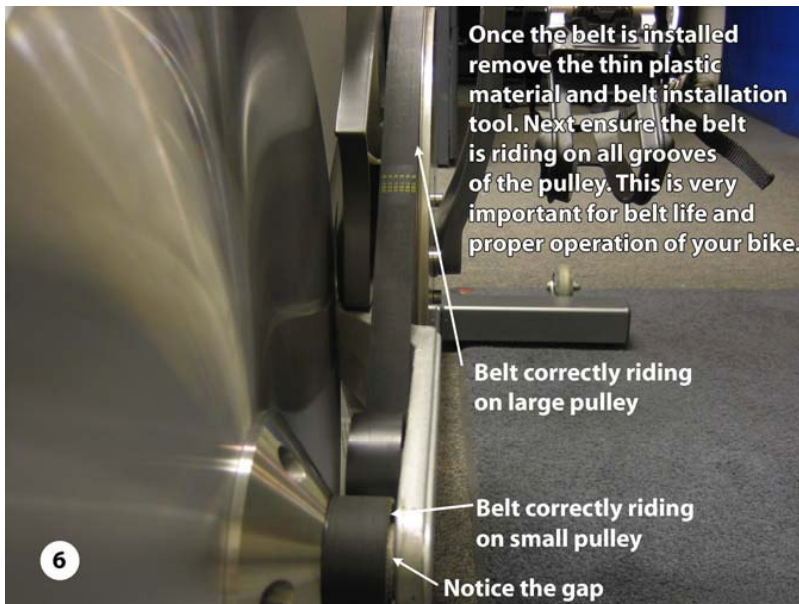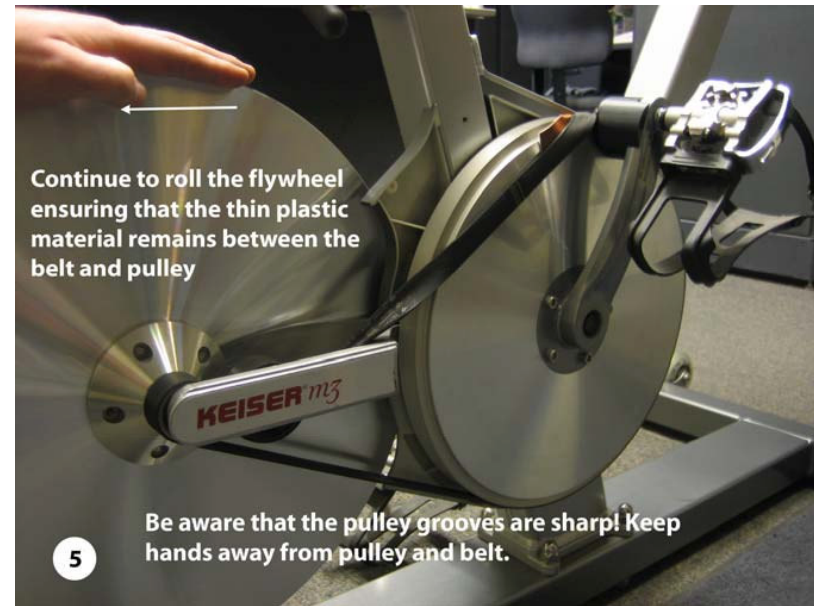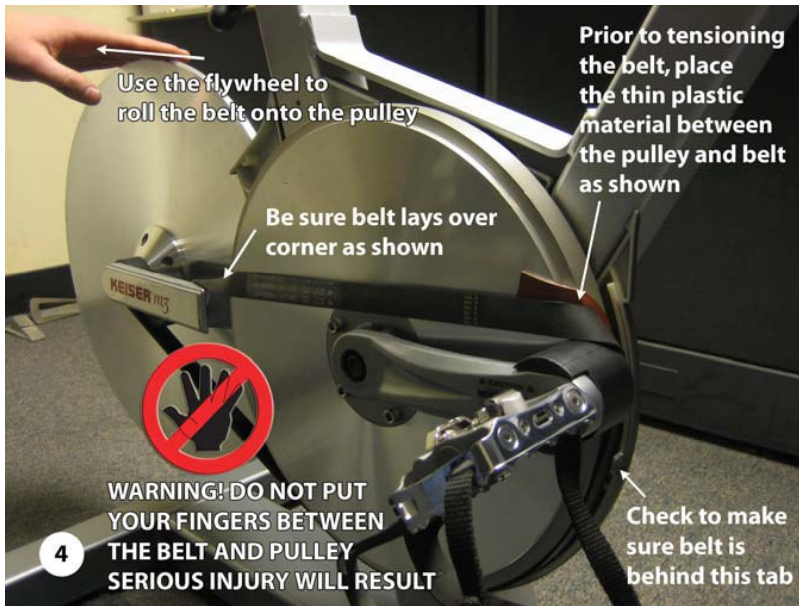

7.) Replace all plastic covers starting with step 4 of “Steps for Belt Removal” and work backwards to step 1. Spin up the bike to ensure proper operation.

KEISER

2470 S CHERRY AVE • FRESNO CA 93706
TOLL FREE 1.800.888.7009 • PHONE 559.256.8000
FAX 559.256.8100 • www.keiser.com

555501A