


## How To... Replace the Wax Bag – TR8500 Int'l and TR9000HR Dom/Int'l


### Special Tools Required: None

---

1. Raise the unit to its highest elevation.
2. Turn the power OFF at the ON/OFF switch, and then unplug the unit from the electrical outlet.
3. Pull out the three push rivets that fasten the front edge of the wax tray to the bottom of the treadmill frame then, lower the wax tray. If necessary, use a flat-edge screwdriver to pry off the rivets. The rivets are reusable. Set the front edge of the wax tray down, with the wax bag on top of it.
4. Clamp the wax bag hose to prevent any residual wax from seeping out of the bag. Work the wax bag hose off the barbed fitting on the wax pump, which is the inlet side. Remove the hose clamp, and then discard the empty wax bag.

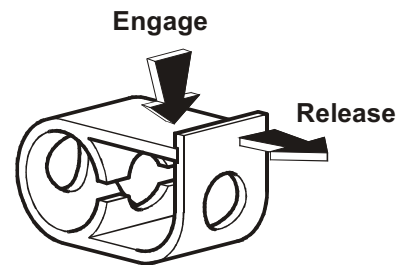

5. Reattach the clamp to the new wax bag hose.
6. Place the new wax bag on top of the tray so its flange is facing out toward the front of the treadmill. The wax bag hose is now near the access hole at the bottom of the motor pan.
7. Cut off the end of the new wax bag hose approximately one half inch from the end. Feed the hose through the access hole in the bottom of the frame, and then push the hose onto the barbed fitting (wax pump inlet side). Once the hose is secured to the barbed fitting, release the hose clamp.

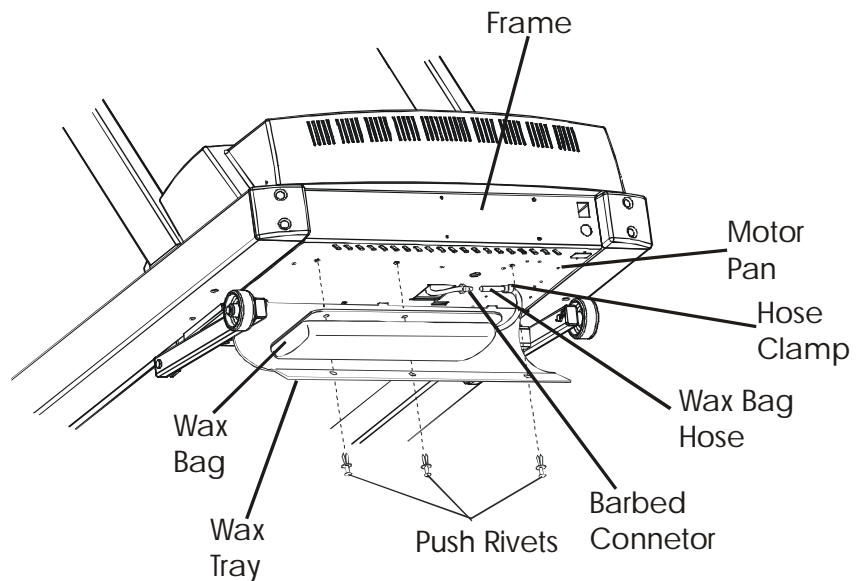

8. Align two holes of the wax bag flange with the two holes at the front edge of the wax tray and at the bottom of the treadmill frame. Attach the wax tray and wax bag to frame with two push-rivets. Push these rivets in as far as possible, then insert the third rivet.
9. Log maintenance repair.