

# INSTALL

## MYE CableSAT Install Instructions

Applies to: MYE CableSAT

 **Enhanced Images:** Pictures can be zoomed in to any level for detail. Use the standard zoom tools for your platform to zoom in.


MYE CableSAT Install Instructions (No STB) - Pg. 1

MYE CableSAT Install Instructions with STB - Pg. 2

Set Top Box (STB) Selection Instructions - Pg. 3

IR Remote Auto Learn Mode - Pg. 4


### MYE CableSAT Install (No STB):

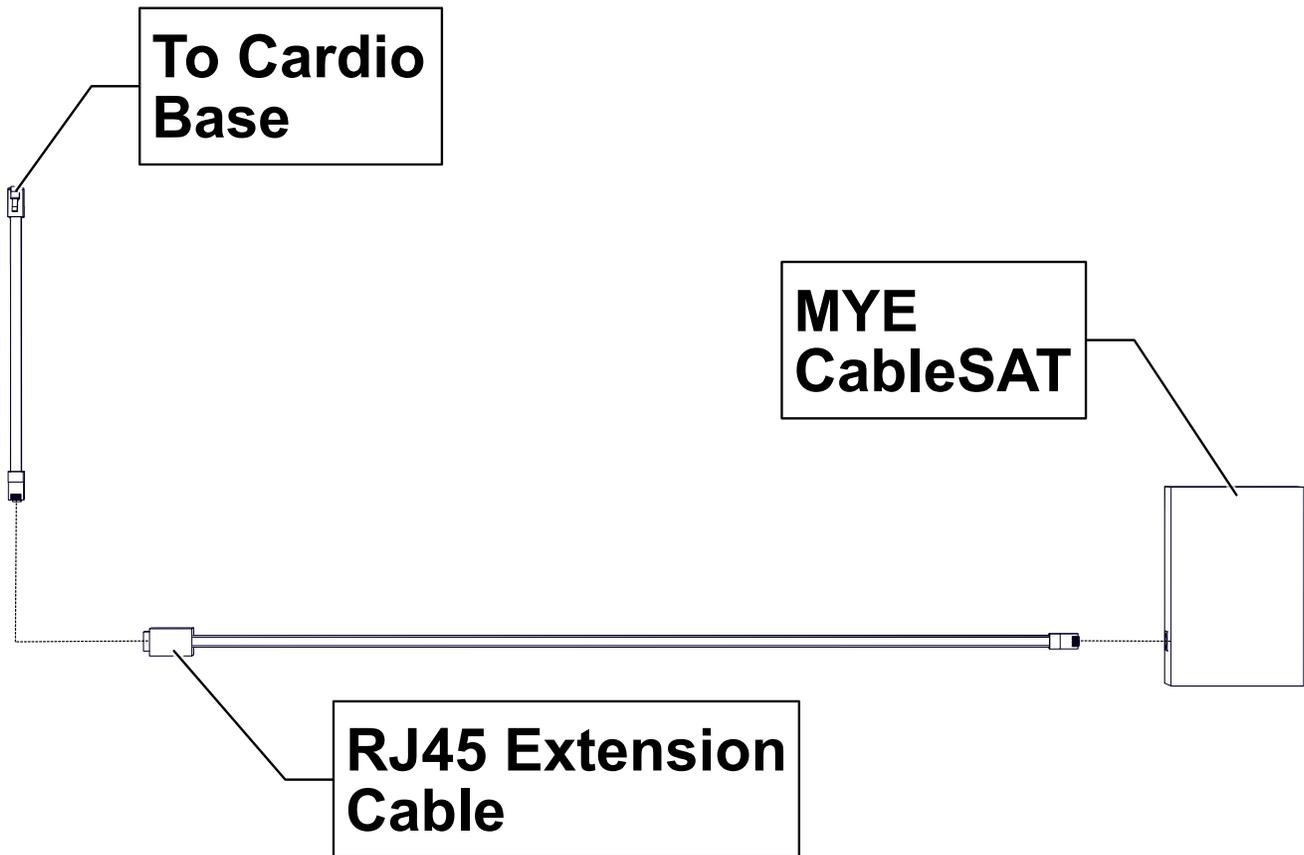

After installing the MYE CableSAT, please continue to Page 3.

# INSTALL

MYE CableSAT Install with STB:

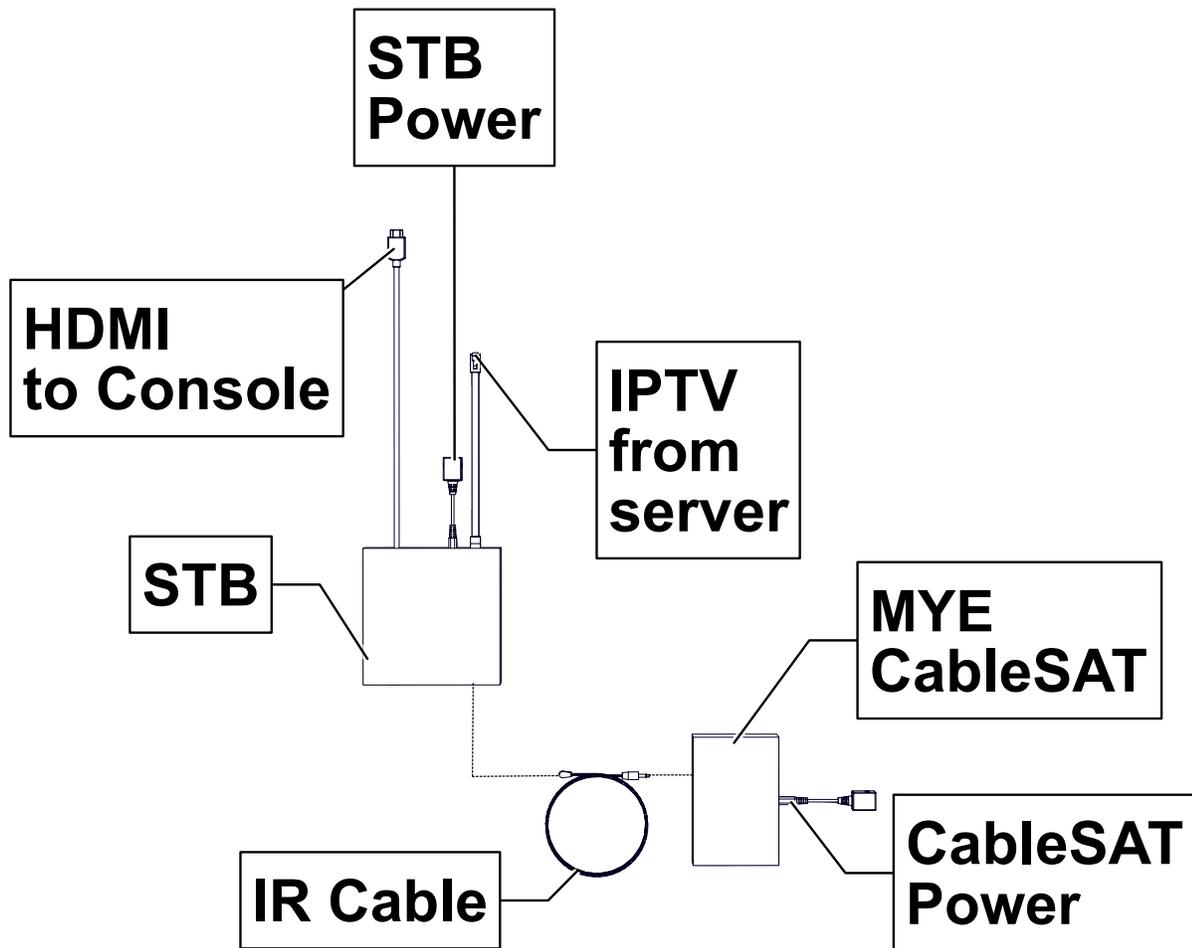

After installing the MYE CableSAT, please continue to Page 3.

# INSTALL

## Set Top Box (STB) Selection Instructions:

1. Start with the CableSAT power disconnected.
2. Using a pen or paperclip, press and hold the “PGM” switch.
3. Connect power to the CableSAT.
4. Hold in the “PGM” switch - the transmitter is now in AUTO LEARN mode.
5. Press and release the switch a 2nd time.
6. All LEDs will light briefly, followed by the Power LED. You are now in the set top box series of presets.
7. To select one of the set top boxes listed, press the “PGM” switch to cycle through the presets. Set top boxes are represented in the chart below:

	LEARN MODE	LEARNED COMMANDS	AT&T	COMCAST, TECHNICOLOR DCI401MCS	DIRECTV	VERIZON, FCN, GRANDE, MEDICOM, ROGERS, SUDDENLINK, BEND, WAVE, CHARTER (ARRIS), CHARTER (PACE)	TIME WARNER, COX, WOW, BRIGHT HOUSE, CABELVISION, OPTIMUM, CHARTER (CISCO) SPECTRUM (TECHNICOLOR)	DISH, BELL CANADA, COX MINI BOX, ATLANTIC BROADBAND	ENSEO	STRONG (EUROPE)	OPTICUM (EUROPE)	TECHNISTAT (EUROPE)	LG STB3000, STB5500	NEVRON (EUROPE)
POWER	●	●		●		●		●	●		●		●	
LEARN	●		●	●			●	●		●	●			●
PROGRAMMED					●	●	●	●				●	●	●
ERROR									●	●	●	●	●	●

8. Once the desired set top box is displayed, press and hold the “PGM” switch until the red “error” LED turns solid.
9. Release the “PGM” key. All LEDs will flash briefly to indicate the CableSat is programmed and ready to use.

# INSTALL

## **\*\*\*IR remote Auto Learn Mode**

For use when the setp top box is not listed in presents.

1. Start with the CableSAT power disconnected.
2. Using a pen or paperclip, press and hold the “PGM” switch.
3. Connect power to the CableSAT.
4. Hold in the “PGM” switch until the “power” and “learn” LEDs.
5. Release the “PGM” switch - the transmitter is now in AUTO LEARN mode.
6. Point the TV’s IR remote control at the IR window in the side panel of the CableSAT.
7. Press the Channel Up key on the remote control
8. The learn LED will flicker and the Programmed LED will light solid once the command has been learned. The learn LED will then light solid again.
9. Press the Channel Down key on the remote control.
10. Again the Learn LED will flicker and the Programmed LED will light solid once the command has been learned. Learn LED will light solid again.
11. Press the following keys in succession. Be sure to wait for the Learn and Program LED to light up as each key is learned.
12. Press 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, “Dash or Enter”, CC and Previous on the remote.
13. All LEDs will flash briefly to indicate that the CableSat is programmed and ready.

\*\*\*If you get a red ERROR light, remove power from the receiver and start again.